
A Diffusion Theory For Deep Learning Dynamics: Stochastic Gradient Descent Exponentially Favors Flat Minima

Zeke Xie

The University of Tokyo
RIKEN Center for AIP
xie@ms.k.u-tokyo.ac.jp

Issei Sato

The University of Tokyo
RIKEN Center for AIP
sato@k.u-tokyo.ac.jp

Masashi Sugiyama

RIKEN Center for AIP
The University of Tokyo
sugi@k.u-tokyo.ac.jp

Abstract

Stochastic Gradient Descent (SGD) and its variants are mainstream methods for training deep networks in practice. SGD is known to find a flat minimum that generalizes well. However, it is mathematically unclear how deep learning can select a flat minimum among so many minima. To answer the question quantitatively, we develop a density diffusion theory (DDT) to reveal how minima selection quantitatively depends on the minima sharpness and the hyperparameters. We empirically verify a key property of stochastic gradient noise (SGN) that the SGN covariance is approximately proportional to the Hessian and inverse to the batch size. To the best of our knowledge, we are the first to prove that, benefited from the Hessian-dependent structure of SGN, SGD favors flat minima exponentially more than sharp minima, while Gradient Descent (GD) with injected white noise favors flat minima only polynomially more than sharp minima. We also reveal that either a small learning rate or large-batch training requires exponentially many iterations to escape from minima in terms of the ratio of batch size and learning rate. Thus, large-batch training cannot search flat minima efficiently in a realistic computational time.

1 Introduction

In recent years, deep learning (LeCun et al., 2015) has achieved great empirical success in various application areas. Due to the over-parametrization and the highly complex loss landscape of deep networks, optimizing deep networks is a difficult task. Stochastic Gradient Descent (SGD) and its variants are mainstream methods for training deep networks. Empirically, SGD can usually find flat minima among a large number of sharp minima and local minima (Hochreiter and Schmidhuber, 1995, 1997). More papers reported that learning flat minima closely relate to generalization (Hardt et al., 2016; Zhang et al., 2017a; Arpit et al., 2017; Hoffer et al., 2017; Dinh et al., 2017; Neyshabur et al., 2017; Wu et al., 2017; Dziugaite and Roy, 2017; Kleinberg et al., 2018). Some researchers specifically study flatness itself. They try to measure flatness (Hochreiter and Schmidhuber, 1997; Keskar et al., 2017; Sagun et al., 2017; Yao et al., 2018), rescale flatness (Tsuzuku et al., 2019), and find flatter minima (Hoffer et al., 2017; Chaudhari et al., 2017; He et al., 2019b). However, most existing findings are qualitative. We still lack a quantitative theory that answers why deep learning selects a flat minimum with such a high probability.

The diffusion theory is an important theoretical tool to understand how deep learning dynamics works. It helps us model the diffusion process of probability densities of parameters instead of model parameters themselves. The density diffusion process of Stochastic Gradient Langevin Dynamics (SGLD) under injected isotropic noise has been discussed by (Sato and Nakagawa, 2014; Raginsky et al., 2017; Zhang et al., 2017b; Xu et al., 2018). Zhu et al. (2019) revealed that anisotropic diffusion

of SGD often leads to flatter minima than isotropic diffusion. A few papers have quantitatively studied the diffusion process of SGD under the isotropic gradient noise assumption. [Jastrzębski et al. \(2017\)](#) first studied the minima selection probability of SGD. [Smith and Le \(2018\)](#) presented a Bayesian perspective on generalization of SGD. [Wu et al. \(2018\)](#) studied the escape problems of SGD from a dynamical perspective, and obtained the qualitative conclusion on the effects of batch size, learning rate, and sharpness. [Hu et al. \(2019\)](#) quantitatively showed that the mean escape time of SGD exponentially depends on the inverse learning rate. [Achille and Soatto \(2019\)](#) also obtained a related proposition that describes the mean escape time in terms of a free energy that depends on the Fisher Information. [Li et al. \(2017\)](#) analyzed Stochastic Differential Equation (SDE) of multiple stochastic optimizers. [Nguyen et al. \(2019\)](#) mainly contributed to closing the theoretical gap between continuous-time dynamics and discrete-time dynamics under isotropic heavy-tailed noise.

These related papers only quantitatively analyzed the diffusion process under parameter-independent and isotropic gradient noise, while SGN is highly parameter-dependent and anisotropic in deep learning dynamics. Thus, they failed to quantitatively formulate how SGD selects flat minima, which closely depends on the Hessian-dependent structure of SGN. We try to bridge the gap between the qualitative knowledge and the quantitative theory for SGD in the presence of parameter-dependent and anisotropic SGN. Mainly based on Theorem 3.2, we have four contributions:

- The proposed theory formulates the fundamental roles of gradient noise, batch size, the learning rate, and the Hessian in minima selection.
- The SGN covariance is approximately proportional to the Hessian and inverse to batch size.
- Either a small learning rate or large-batch training requires exponentially many iterations to escape minima in terms of ratio of batch size and learning rate.
- To the best of our knowledge, we are the first to theoretically and empirically reveal that SGD favors flat minima exponentially more than sharp minima.

2 Stochastic Gradient Noise and Stochastic Differential Equations

We mainly introduce necessary foundation for the proposed diffusion theory in this section. We denote the data samples as $x = \{x_j\}_{j=1}^m$, the model parameters as θ and the loss function as $L(\theta, x)$. For simplicity, we denote the training loss as $L(\theta)$. Following [Mandt et al. \(2017\)](#), we may write SGD dynamics as

$$\theta_{t+1} = \theta_t - \eta \frac{\partial \hat{L}(\theta_t, x)}{\partial \theta_t} = \theta_t - \eta \frac{\partial L(\theta_t)}{\partial \theta_t} + \eta C(\theta_t)^{\frac{1}{2}} \zeta_t, \quad (1)$$

where $\hat{L}(\theta)$ is the loss of one minibatch, $\zeta_t \sim \mathcal{N}(0, I)$, and $C(\theta)$ represents the gradient noise covariance matrix. We consider that the SGN is approximately Gaussian, $\mathcal{N}(0, C(\theta))$.

Stochastic Gradient Noise Analysis. We first note that the SGN we study is introduced by minibatch training, $C(\theta_t)^{\frac{1}{2}} \zeta_t = \frac{\partial L(\theta_t)}{\partial \theta_t} - \frac{\partial \hat{L}(\theta_t)}{\partial \theta_t}$, which is the difference between gradient descent and stochastic gradient descent. According to Generalized Central Limit Theorem ([Gnedenko et al., 1954](#)), the mean of many infinite-variance random variables converges to a stable distribution, while the mean of many finite-variance random variables converges to a Gaussian distribution. As SGN is finite in practice, we believe the Gaussian approximation of SGN is reasonable.

[Simsekli et al. \(2019\)](#) argued that SGN is Lévy noise (stable variables), rather than Gaussian noise. They presented empirical evidence showing that SGN seems heavy-tailed, and the heavy-tailed distribution looks closer to a stable distribution than a Gaussian distribution. However, this research line ([Simsekli et al., 2019](#); [Nguyen et al., 2019](#)) relies on a hidden strict assumption that SGN must be isotropic and obey the same distribution across dimensions. Recently, some researchers start to feel confused about the studied “SGN” in [Simsekli et al. \(2019\)](#), which is different from SGN introduced by minibatches. [Simsekli et al. \(2019\)](#) computed “SGN” across n model parameters and regarded “SGN” as n samples drawn from a *single-variant* distribution. This is why *one tail-index for all parameters* was studied in [Simsekli et al. \(2019\)](#). The isotropic assumption cannot capture the important relation between SGN and the Hessian. The arguments against Gaussian noise in [Simsekli et al. \(2019\)](#) actually do not hold for *parameter-dependent and anisotropic* Gaussian noise. In our paper, SGN computed over different minibatches obeys a *N-variant* Gaussian distribution, which can be *θ -dependent and anisotropic*.

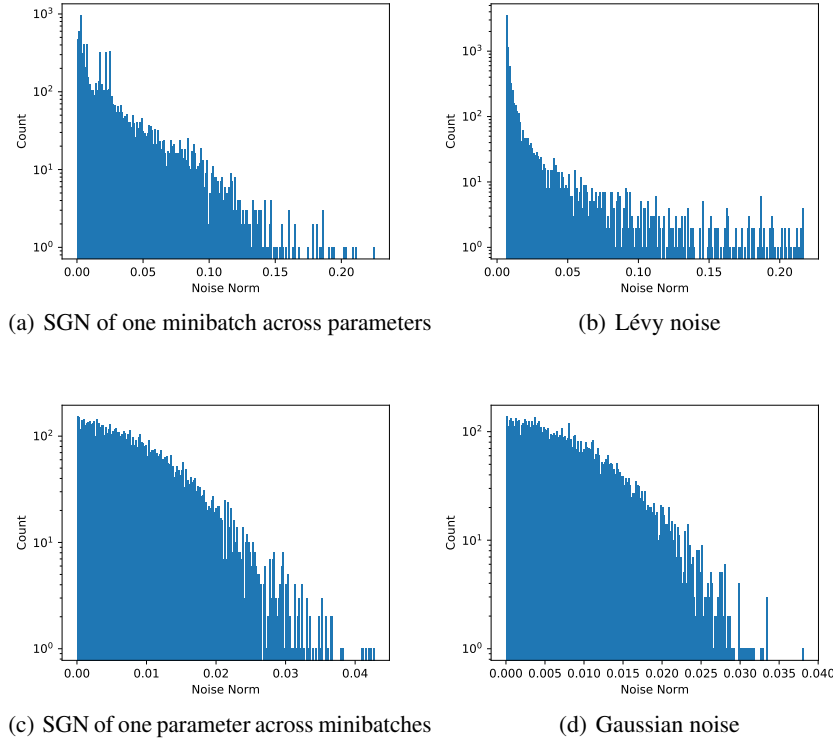


Figure 1: The Stochastic Gradient Noise Analysis. The histogram of the norm of the gradient noises computed with the three-layer fully-connected network on MNIST (LeCun, 1998). (a) and (c): the histograms of the norms of two kinds of “SGN”: (a) “SGN” is computed over parameters, which is actually stochastic gradient rather than SGN; (c) SGN is computed over minibatches. (b) and (d): the histograms of the norms of (scaled) Gaussian noise and Lévy noise. Based on (a) and (b), Simsekli et al. (2019) argued that stochastic gradient (noise) across dimensions is heavy-tailed Lévy noise. Based on (c) and (d), we show that SGN without the isotropic restriction is still approximately Gaussian noise.

The isotropic assumption on gradient noise in Simsekli et al. (2019) is too rough to capture the Hessian-dependent covariance structure of SGN, which we will study later. In Figure 1, we empirically verify that SGN is highly similar to Gaussian noise instead of heavy-tailed Lévy noise, while we recover the experiment of Simsekli et al. (2019) to show that gradient noise computed across parameters in Simsekli et al. (2019) is indeed approximately Lévy noise. This actually suggests that the contradicted observations are from the different formulations of SGN. Simsekli et al. (2019) studied the distribution of SGN as a single-variant distribution, while we relax it as a n -variant distribution. Our empirical analysis in Figure 1 holds well at least when the batch size B is usually larger than 16, which is common in practice. Similar empirical evidence can also be observed for training ResNet18 (He et al., 2016) on CIFAR-10 (Krizhevsky et al., 2009), seen in Appendix B. Our theory focuses on parameter-dependent and anisotropic SGN and brings an improvement over existing parameter-independent heavy-tailed noise, although Simsekli et al. (2019) brought an improvement over more conventional parameter-independent Gaussian noise. A more sophisticated theory is interesting under θ -independent anisotropic heavy-tailed noise, when the batch size is too small (~ 1) to apply Central Limit Theorem. We will leave it as future work.

SGD as Stochastic Differential Equations. Let us replace η by dt as unit time. Then the continuous-time dynamics of SGD is written as

$$d\theta = -\frac{\partial L(\theta)}{\partial \theta} dt + [2D(\theta)]^{\frac{1}{2}} dW_t, \quad (2)$$

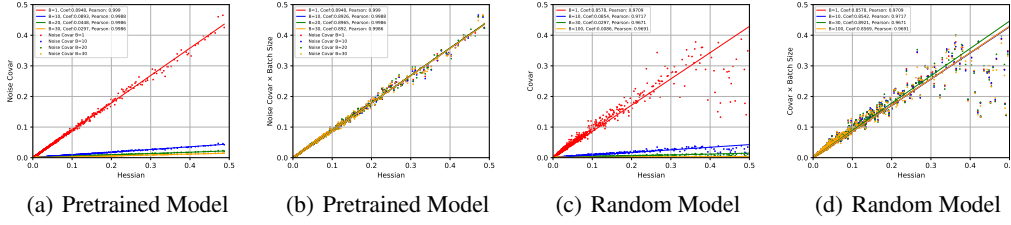


Figure 2: We empirically verified $C(\theta) = \frac{H(\theta)}{B}$ by using three-layer fully-connected network on MNIST (LeCun, 1998). The pretrained Models are usually near critical points, while randomly Initialized Models are far from critical points. We display all elements $H_{(i,j)} \in [1e-4, 0.5]$ of the Hessian matrix and the corresponding elements $C_{(i,j)}$ of gradient noise covariance matrix in the space spanned by the eigenvectors of Hessian. Another supplementary experiment on Avila Dataset (De Stefano et al., 2018) in Appendix B reports $\hat{C}_{avila} \approx 1.004 \frac{H}{B}$. The small difference factor between the empirical result and the ideal Equation is mainly because the pretrained network is not perfectly located at a critical point.

where $dW_t \sim \mathcal{N}(0, Idt)$ and $D(\theta) = \frac{\eta}{2} C(\theta)$. We note that the dynamical time t in the continuous-time dynamics is equal to the product of the number of iterations T and the learning rate η : $t = \eta T$. The associated Fokker-Planck Equation is written as

$$\frac{\partial P(\theta, t)}{\partial t} = \nabla \cdot [P(\theta, t) \nabla L(\theta)] + \nabla \cdot \nabla D(\theta) P(\theta, t) \quad (3)$$

$$= \sum_i \frac{\partial}{\partial \theta_i} \left[P(\theta, t) \frac{\partial L(\theta)}{\partial \theta_i} \right] + \sum_i \sum_j \frac{\partial^2}{\partial \theta_i \partial \theta_j} D_{ij}(\theta) P(\theta, t), \quad (4)$$

where ∇ is a nabla operator, and D_{ij} is the element in the i th row and j th column of D . In standard Stochastic Gradient Langevin Dynamics (SGLD), the injected gradient noise is fixed and isotropic Gaussian, $D = I$. In SGD, the SGN is θ -dependent and anisotropic Gaussian.

The next question is how to formulate the covariance matrix $C(\theta)$ of SGN? Based on Smith and Le (2018), we can express the SGN covariance as

$$C(\theta) = \frac{1}{B} \left[\frac{1}{m} \sum_{i=1}^m \nabla L(\theta, x_j) \nabla L(\theta, x_j)^\top - \nabla L(\theta) \nabla L(\theta)^\top \right] \approx \frac{1}{Bm} \sum_{i=1}^m \nabla L(\theta, x_j) \nabla L(\theta, x_j)^\top. \quad (5)$$

The approximation is true near critical points, due to the fact that the gradient noise variance dominates the gradient mean near critical points. We know the observed fisher information matrix satisfies $Fisher(\theta) \approx H(\theta)$ near minima, referring to Chapter 8 of (Pawitan, 2001). Following Jastrzebski et al. (2017); Zhu et al. (2019), we obtain

$$C(\theta) \approx \frac{1}{Bm} \sum_{j=1}^m \nabla L(\theta, x_j) \nabla L(\theta, x_j)^\top = \frac{1}{B} Fisher(\theta) \approx \frac{1}{B} H(\theta), \quad (6)$$

which approximately gives

$$D(\theta) = \frac{\eta}{2} C(\theta) = \frac{\eta}{2B} H(\theta) \quad (7)$$

near minima. It indicates that the SGN covariance $C(\theta)$ is approximately proportional to the Hessian $H(\theta)$ and inverse to the batch size B . Obviously, we can generalize Equation 7 by $D(\theta) = \frac{\eta C(\theta)}{2} = \frac{\eta}{2B} [H(\theta)]^+$ near critical points, when there exist negative eigenvalues in H along some directions. We use $[\cdot]^+$ to denote the positive semidefinite transformation of a symmetric matrix: if we have the eigendecomposition $H = U^\top \text{diag}(H_1, \dots, H_{n-1}, H_n) U$, then $[H]^+ = U^\top \text{diag}(|H_1|, \dots, |H_{n-1}|, |H_n|) U$.

We empirically verify this relation in Figure 2 for pretrained fully-connected networks and randomly initialized fully-connected networks on real-world datasets. The Pearson Correlation is up to 0.999

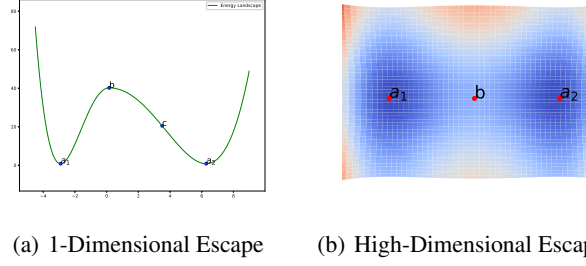


Figure 3: Kramers Escape Problem. a_1 and a_2 are minima of two neighboring valleys. b is the saddle point separating the two valleys. c locates outside of Valley a_1 .

for pretrained networks, which is near minima. We note that, the relation still approximately holds for even the randomly network, which is far from critical points. The correlation is especially high along the flat directions with small-magnitude eigenvalues of the Hessian. We emphasize that previous papers with the isotropic Lévy or Gaussian noise approximation all failed to capture this core relation in deep learning dynamics.

3 SGD Diffusion Theory

We start the theoretical analysis from the classical Kramers Escape Problem (Kramers, 1940). We assume there are two valleys, Sharp Valley a_1 and Flat Valley a_2 , seen in Figure 3. Also Col b is the boundary between two valleys. What is the mean escape time for a particle governed by Equation 2 to escape from Sharp Valley a_1 to Flat Valley a_2 ? The mean escape time is widely used in related statistical physics and stochastic process (Van Kampen, 1992; Nguyen et al., 2019).

Gauss’s Divergence Theorem (Arfken and Weber, 1999; Lipschutz et al., 2009) states that the surface integral of a vector field over a closed surface, which is called the flux through the surface, is equal to the volume integral of the divergence over the region inside the surface. We respectively denote the mean escape time as τ , the escape rate as γ , and the probability current as J . We apply Gauss’s Divergence Theorem to the Fokker-Planck Equation resulting in

$$\nabla \cdot [P(\theta, t) \nabla L(\theta)] + \nabla \cdot \nabla D(\theta) P(\theta, t) = \frac{\partial P(\theta, t)}{\partial t} = -\nabla \cdot J(\theta, t). \quad (8)$$

The mean escape time is expressed (Van Kampen, 1992) as

$$\tau = \frac{1}{\gamma} = \frac{P(\theta \in V_a)}{\int_{S_a} J \cdot dS}, \quad (9)$$

where $P(\theta \in V_a) = \int_{V_a} P(\theta) dV$ is the current probability inside Valley a, J is the probability current produced by the probability source $P(\theta \in V_a)$, $j = \int_{S_a} J \cdot dS$ is the probability flux (surface integrals of probability current), S_a is the surface (boundary) surrounding Valley a, and V_a is the volume surrounded by S_a . We have $j = J$ in the case of one-dimensional escape.

Classical Assumptions. We state three classical assumptions first for the density diffusion theory. Assumption 1 is the common second order Taylor approximation, which was also used by (Mandt et al., 2017; Zhang et al., 2019). Assumptions 2 and 3 are widely used in many fields’ Kramers Escape Problems, including statistical physics, chemistry, and biology (Van Kampen, 1992; Zhou, 2010). Related machine learning papers, such as Jastrzębski et al. (2017), usually used Assumptions 2 and 3 as the background of Kramers Escape Problems.

Assumption 1 (The Second Order Taylor Approximation). *The loss function around critical points θ^* can be approximately written as*

$$L(\theta) = L(\theta^*) + g(\theta^*)(\theta - \theta^*) + \frac{1}{2}(\theta - \theta^*)^\top H(\theta^*)(\theta - \theta^*).$$

Assumption 2 (Quasi-Equilibrium Approximation). *The system is in quasi-equilibrium near minima.*

Assumption 3 (Low Temperature Approximation). *The gradient noise is small (low temperature).*

We will dive into these two assumptions deeper than previous papers in the deep learning domain. Assumptions 2 and 3 actually mean that our diffusion theory can better describe the escape processes that cost more iterations. As this class of “slow” escape processes takes main computational time compared with “fast” escape processes, this class of “slow” escape process is more interesting in training of deep neural networks. Our empirical analysis in Section 4 at least supports that the escape processes in the wide range of iterations (50 to 100,000 iterations) can be modeled by our theory very well. Thus, Assumption 2 and 3 are reasonable for deep learning dynamics.

Assumption 2 indicates that the dynamical system is in equilibrium near minima but not necessarily near saddle points. It means that $\frac{\partial P(\theta, t)}{\partial t} = -\nabla \cdot J(\theta, t) \approx 0$ holds near minima a_1 and a_2 , but not necessarily holds near saddle point b . Quasi-Equilibrium Assumption is actually weaker but more useful than the conventional stationary assumption. Under Assumption 2, the probability density P can behave like a stationary distribution only inside valleys, but density transportation through saddle points can be busy. Quasi-Equilibrium is more like: stable lakes (loss valleys) is connected by rapid Rivers (escape paths). In contrast, the stationary assumption requires strictly zero flux between lakes (loss valleys). Little knowledge about density motion can be obtained under the stationary assumption.

Assumption 3 is justified when $\frac{\eta}{B}$ is small (Jastrzębski et al., 2017). Under Assumption 3, we may apply the second order Taylor approximation of the training loss around critical points, and the probability densities escape Valley a only along most possible paths (MPPs). Because the probability density far from critical points and MPPs is very small under Assumption 3. We generalize the concept of critical points into critical paths as the path where 1) the gradient perpendicular to the path direction must be zero, and 2) the second order directional derivatives perpendicular to the path direction must be nonnegative. MPPs must be critical paths. The most possible escape direction at one point must be the direction of one eigenvector of the Hessian at the point.

The boundary between Sharp Valley a_1 and Flat Valley a_2 is the saddle point, Col b , where the Hessian matrix H_b must have only one negative eigenvalue and the corresponding eigenvector is the escape direction. Without losing generality, we first assume that there is only one most possible path through Col b existing between Sharp Valley a_1 and Flat Valley a_2 .

SGLD diffusion. We first analyze a simple case: how does SGLD escape sharp minima? Researchers are interesting in SGLD, when the injected noise usually dominates SGN as $\eta \rightarrow 0$ in final epochs. This is an interesting case because SGLD may work as a Bayesian inference method in this limit Welling and Teh (2011). Thus we may simplify the diffusion matrix D as a constant number for SGLD in the limit of $\eta \rightarrow 0$. SGLD is simplified as Gradient Descent with injected white noise, whose behavior is identical to Kramers Escape Problem with thermo noise in statistical physics. We formulate the answer as Theorem 3.1, which is closely related to the selection probability in Jastrzębski et al. (2017) under the isotropic noise. We leave the proof in Appendix A.1. We also note that more precise SGLD diffusion analysis should study a mixture of injected white noise and SGN.

Theorem 3.1 (SGLD Escapes Minima). *The loss function $L(\theta)$ is of class C^2 and n -dimensional. Only one most possible path exists between Valley a and the outside of Valley a . If Assumption 1, 2, and 3 hold, and the dynamics is governed by SGLD, then the mean escape time from Valley a to the outside of Valley a is*

$$\tau = \frac{1}{\gamma} = 2\pi \sqrt{\frac{-\det(H_b)}{\det(H_a)}} \frac{1}{|H_{be}|} \exp\left(\frac{\Delta L}{D}\right).$$

We denote that H_a and H_b are the Hessians of the loss function at the minimum a and the saddle point b , $\Delta L = L(b) - L(a)$ is the loss barrier height, e indicates the escape direction, and H_{be} is the eigenvalue of the Hessian H_b corresponding to the escape direction. The diffusion coefficient D is usually set to 1 in SGLD.

SGD diffusion. However, SGD diffusion is essentially different from SGLD diffusion in several aspects: 1) anisotropic diffusion, 2) parameter-dependent diffusion, and 3) the stationary distribution of SGD is far from the Gibbs-Boltzmann distribution, $P(\theta) = \frac{1}{Z} \exp\left(-\frac{L(\theta)}{D}\right)$. Particularly, how do these characteristics depend on the hyperparameters and the Hessian? These different characteristics make SGD diffusion behave differently from any physical dynamical systems, and much less studied

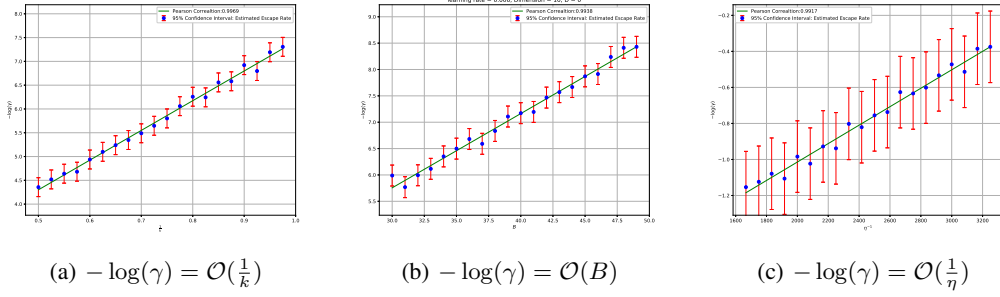


Figure 4: The mean escape time analysis of SGD by using Styblinski-Tang Function. The Pearson Correlation is higher than 0.99. Left Column: Sharpness. Middle Column: Batch Size. Right Column: Learning Rate.

than SGLD diffusion. We formulate Theorem 3.2 for SGD. We leave the proof in Appendix A.2. The theoretical analysis of SGD can be easily generalized to the dynamics with a mixture of SGN and injected white noise, as long as the eigenvectors of the total diffusion matrix $D(\theta)$ are closely aligned with the eigenvectors of $H(\theta)$.

Theorem 3.2 (SGD Escapes Minima). *The loss function $L(\theta)$ is of class C^2 and n -dimensional. Only one most possible path exists between Valley a and the outside of Valley a . If Assumption 1, 2, and 3 hold, and the dynamics is governed by SGD, then the mean escape time from Valley a to the outside of Valley a is*

$$\tau = 2\pi \frac{1}{|H_{be}|} \exp \left[\frac{2B\Delta L}{\eta} \left(\frac{s}{H_{ae}} + \frac{(1-s)}{|H_{be}|} \right) \right].$$

We denote that $s \in (0, 1)$ is a path-dependent parameter, and H_{ae} and H_{be} are, respectively, the top eigenvalues of the Hessians at the minimum a and the saddle point b corresponding to the escape direction.

Multiple-path escape. Each escape path contributes to the total escape rate. Multiple paths combined together have a total escape rate. If there are multiple parallel from the start valley to the end valley, we can compute the total escape rate easily based on the following computation rule. The computation rule is based on the fact that the probability flux integrals are additive. We can easily generalize the mean escape time analysis into the cases that there are multiple parallel escape paths.

Rule 1. *If there are parallel MPPs between the start valley and the end valley, then $\gamma = \sum_p \gamma_p$.*

The probability of minima selection. Now, we may formulate the probability of minima selection as Proposition 1. We leave the proof in Appendix A.3. In deep learning, one loss valley represents one mode and the landscape contain many good modes and bad modes. It transits from one mode to another mode during training. The longer mean escape time of one mode means that it will spend more iterations in this mode during training, which is naturally proportional to the probability of selecting this mode after the termination.

Proposition 1. *Suppose there are two valleys connecting together and the escape rates to the outside of the two valleys are ignorable. If all assumptions of Theorem 3.2 hold, then the stationary distribution of locating these valleys is given by*

$$P(\theta \in V_a) = \frac{\tau_a}{\sum_v \tau_v}.$$

v is the index of valleys. τ_v is the mean escape time from Valley v to the outside of Valley v .

4 Empirical Analysis

In this section, we try to directly validate the escape formulas on real-world datasets. Each escape process, from the inside of loss valleys to the outside of loss valleys, are repeatedly simulated for 100 times under various gradient noise scales, batch sizes, learning rates, and sharpness.

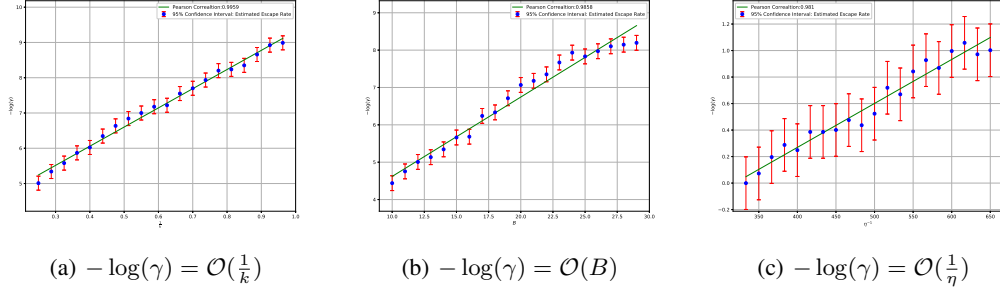


Figure 5: The mean escape time analysis of SGD by training neural networks on Avila Dataset. Left Column: Sharpness. Middle Column: Batch Size. Right Column: Learning Rate. We leave the results on Banknote Authentication, Cardiotocography, and Sensorless Drive Diagnosis in Appendix C.

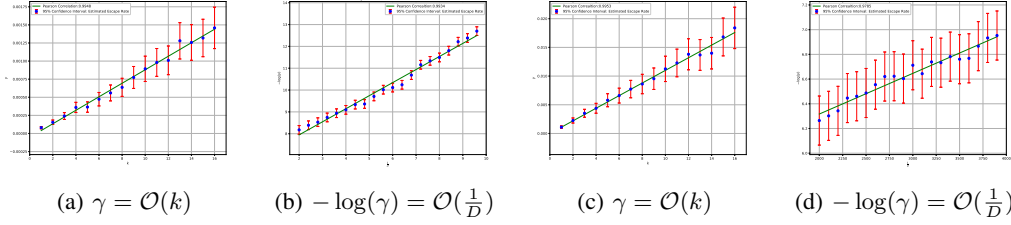


Figure 6: The mean escape time analysis of SGLD. Subfigure (a) and (b): Styblinski-Tang Function. Subfigure (c) and (d): Neural Network.

How to compare the escape rates under the same settings with various minima sharpness? Our method is to multiply a rescaling factor \sqrt{k} to each parameter, and the Hessian will be proportionally rescaled by a factor k . If we let $L(\theta) = f(\theta) \rightarrow L(\theta) = f(\sqrt{k}\theta)$, then $H(\theta) = \nabla^2 f(\theta) \rightarrow H(\theta) = k\nabla^2 f(\theta)$. Thus we can use k to indicate the minima sharpness. The theoretical relations of SGD we try to validate can be formulated as: (1) $-\log(\gamma) = \mathcal{O}(\frac{1}{k})$, (2) $-\log(\gamma) = \mathcal{O}(B)$, and (3) $-\log(\gamma) = \mathcal{O}(\frac{1}{\eta})$.

The mean escape time analysis of SGD. Styblinski-Tang Function, which has multiple minima and saddle points, is a common test function for nonconvex optimization. We leave the details of Styblinski-Tang Function in Appendix D. In this intuitional 10-dimensional experiment, the simulations start from a given minimum and terminate when reaching the boundary of the loss valley. The number of iterations is recorded for calculating the escape rate. Figure 4 clearly verifies that the escape rate exponentially depends on the minima sharpness (reflected by k), the batch size, and the learning rate, which fully supports our theoretical results.

We also train fully connected networks on four real-world datasets, including a) Avila, b) Banknote Authentication, c) Cardiotocography, d) Dataset for Sensorless Drive Diagnosis (De Stefano et al., 2018; Dua and Graff, 2017). Figure 5 demonstrates that our theoretical analysis also has the powerful predictability for deep learning dynamics on real-world datasets. To the best of our knowledge, we are the first to theoretically and empirically demonstrate that neural networks trained via SGD favors flat minima exponentially more than sharp minima.

The mean escape time analysis of SGLD. The theoretical relations of SGLD (dominated by injected Gaussian noise) we try to validate can be formulated as $\gamma = \mathcal{O}(k)$ and $-\log(\gamma) = \mathcal{O}(\frac{1}{D})$. Figure 6 shows that SGLD only favors flat minima polynomially more than sharp minima. Figure 6 also verifies that the injected gradient noise scale exponentially affects flat minima selection as Theorem 3.1 indicates.

We leave the experimental details in Appendix C.1. The supplementary experiments on Logistic Regression and three-layered Multi-Layer Perceptron (MLP) are presented in Appendix D.

5 Discussion

SGLD favors flat minima polynomially more than sharp minima. In SGLD, the mean escape time from one mode to its neighboring modes approximately depends on the Hessian determinant of the minimum, the Hessian determinant of the saddle point, the barrier height and the temperature (the diffusion coefficient). Thus, SGLD favors flat minima polynomially more than sharp minima.

SGD favors flat minima exponentially more than sharp minima. We can discover a few interesting insights about SGD by Theorem 3.2. Most importantly, the mean escape time exponentially depends on the eigenvalue H_{ae} of the Hessian at minima along the escape direction. Thus, SGD favors flat minima exponentially more than sharp minima. We claim one main advantage of SGD comes from the exponential relation of the mean escape time and the minima sharpness. More precisely, the sharpness that dominates deep learning dynamics are the top eigenvalues of the Hessians. The clear meaning of “sharpness” has reformed in contexts of SGLD and SGD. In the context of SGLD, the “sharpness” is quantified by the determinant of the Hessian. In the context of SGD, the “sharpness” is quantified by the eigenvalues of the Hessian along the escape path.

The ratio of the batch size and the learning rate exponentially matters. It explains why large-batch training can easily get trapped near sharp minima, and increasing the learning rate proportionally is helpful for large-batch training (Krizhevsky, 2014; Keskar et al., 2017; Sagun et al., 2017; Smith et al., 2018; Yao et al., 2018; He et al., 2019a). The main cause is large-batch training expects exponentially many iterations to escape minima. The practical computational time is usually too short to search many enough flat minima. We conjecture that exponentially increasing training iterations may be helpful for large batch training, while this is often too expensive in practice.

Low dimensional diffusion. It is observed that most eigenvalues of the Hessian at the loss landscape of over-parametrized deep networks are close to zero, while only a small number of eigenvalues are large (Sagun et al., 2017; Li et al., 2018). Zero eigenvalues indicate zero diffusion along the corresponding directions. Thus, we may theoretically ignore these zero eigenvalue directions. As the escape rate exponentially depends the corresponding eigenvalues, a small number of large eigenvalues means that the diffusion process mainly happens in the relatively low dimensional subspace corresponding to top eigenvalues of the Hessian. Gur-Ari et al. (2018) reported a similar viewpoint. Although the parameter space is very high-dimensional, SGD dynamics hardly depends on those “meaningless” dimensions with small second order directional derivatives. This novel characteristic of SGD significantly reduces the explorable parameter space around one minimum into a much lower dimensional space. Thus, the parameter space of deep learning can be regarded as a probabilistic mixture of many simple low-dimensional space around different minima.

6 Conclusion

We formulate how minima selection quantitatively relates to the batch size, the learning rate, and the Hessian for SGD. The proposed density diffusion theory can well capture SGD dynamics, and is applicable to other related gradient-based stochastic learning dynamics. One essential advantage of SGD is selecting flat minima with an exponentially higher probability than sharp minima. To the best of our knowledge, no previous work has discovered the exponential relation of minima selection to the Hessian at minima, the batch size, and the learning rate. Our work bridges the gap between the qualitative knowledge and the quantitative theoretical knowledge on the minima selection mechanism of SGD. We believe the proposed theory not only helps us understand how SGD selects flat minima, but also provides researchers a powerful theoretical tool to analyze more learning behaviors in future.

Acknowledgement

I would like to express my deep gratitude to Professor Masashi Sugiyama and Professor Issei Sato for their patient guidance and useful critiques of this research work. My grateful thanks are also extended to Dr. Qianyan Tang for his suggestions in physics background. MS was supported by the International Research Center for Neurointelligence (WPI-IRCN) at The University of Tokyo Institutes for Advanced Study.

References

- Achille, A. and Soatto, S. (2019). Where is the information in a deep neural network? *arXiv preprint arXiv:1905.12213*.
- Arfken, G. B. and Weber, H. J. (1999). Mathematical methods for physicists.
- Arpit, D., Jastrzebski, S., Ballas, N., Krueger, D., Bengio, E., Kanwal, M. S., Maharaj, T., Fischer, A., Courville, A., Bengio, Y., et al. (2017). A closer look at memorization in deep networks. In *International Conference on Machine Learning*, pages 233–242.
- Chaudhari, P., Choromanska, A., Soatto, S., LeCun, Y., Baldassi, C., Borgs, C., Chayes, J., Sagun, L., and Zecchina, R. (2017). Entropy-sgd: Biasing gradient descent into wide valleys. In *International Conference on Learning Representations*.
- De Stefano, C., Maniaci, M., Fontanella, F., and di Freca, A. S. (2018). Reliable writer identification in medieval manuscripts through page layout features: The “avila” bible case. *Engineering Applications of Artificial Intelligence*, 72:99–110.
- Dinh, L., Pascanu, R., Bengio, S., and Bengio, Y. (2017). Sharp minima can generalize for deep nets. In *International Conference on Machine Learning*, pages 1019–1028.
- Dua, D. and Graff, C. (2017). UCI machine learning repository.
- Dziugaite, G. K. and Roy, D. M. (2017). Computing nonvacuous generalization bounds for deep (stochastic) neural networks with many more parameters than training data. *arXiv preprint arXiv:1703.11008*.
- Gnedenko, B., Kolmogorov, A., Gnedenko, B., and Kolmogorov, A. (1954). Limit distributions for sums of independent. *Am. J. Math*, 105.
- Gur-Ari, G., Roberts, D. A., and Dyer, E. (2018). Gradient descent happens in a tiny subspace. *arXiv preprint arXiv:1812.04754*.
- Hardt, M., Recht, B., and Singer, Y. (2016). Train faster, generalize better: Stability of stochastic gradient descent. In *International Conference on Machine Learning*, pages 1225–1234.
- He, F., Liu, T., and Tao, D. (2019a). Control batch size and learning rate to generalize well: Theoretical and empirical evidence. In *Advances in Neural Information Processing Systems*, pages 1141–1150.
- He, H., Huang, G., and Yuan, Y. (2019b). Asymmetric valleys: Beyond sharp and flat local minima. In *Advances in Neural Information Processing Systems* 32, pages 2549–2560.
- He, K., Zhang, X., Ren, S., and Sun, J. (2016). Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 770–778.
- Hochreiter, S. and Schmidhuber, J. (1995). Simplifying neural nets by discovering flat minima. In *Advances in neural information processing systems*, pages 529–536.
- Hochreiter, S. and Schmidhuber, J. (1997). Flat minima. *Neural Computation*, 9(1):1–42.
- Hoffer, E., Hubara, I., and Soudry, D. (2017). Train longer, generalize better: closing the generalization gap in large batch training of neural networks. In *Advances in Neural Information Processing Systems*, pages 1729–1739.
- Hu, W., Li, C. J., Li, L., and Liu, J.-G. (2019). On the diffusion approximation of nonconvex stochastic gradient descent. *Annals of Mathematical Sciences and Applications*, 4(1):3–32.
- Jastrzebski, S., Kenton, Z., Arpit, D., Ballas, N., Fischer, A., Bengio, Y., and Storkey, A. (2017). Three factors influencing minima in sgd. *arXiv preprint arXiv:1711.04623*.
- Keskar, N. S., Mudigere, D., Nocedal, J., Smelyanskiy, M., and Tang, P. T. P. (2017). On large-batch training for deep learning: Generalization gap and sharp minima. In *International Conference on Learning Representations*.

- Kleinberg, R., Li, Y., and Yuan, Y. (2018). An alternative view: When does sgd escape local minima? In *International Conference on Machine Learning*, pages 2703–2712.
- Kramers, H. A. (1940). Brownian motion in a field of force and the diffusion model of chemical reactions. *Physica*, 7(4):284–304.
- Krizhevsky, A. (2014). One weird trick for parallelizing convolutional neural networks. *arXiv preprint arXiv:1404.5997*.
- Krizhevsky, A., Hinton, G., et al. (2009). Learning multiple layers of features from tiny images.
- LeCun, Y. (1998). The mnist database of handwritten digits. <http://yann.lecun.com/exdb/mnist/>.
- LeCun, Y., Bengio, Y., and Hinton, G. (2015). Deep learning. *nature*, 521(7553):436.
- Li, H., Xu, Z., Taylor, G., Studer, C., and Goldstein, T. (2018). Visualizing the loss landscape of neural nets. In *Advances in Neural Information Processing Systems*, pages 6389–6399.
- Li, Q., Tai, C., et al. (2017). Stochastic modified equations and adaptive stochastic gradient algorithms. In *Proceedings of the 34th International Conference on Machine Learning-Volume 70*, pages 2101–2110. JMLR. org.
- Lipschutz, S., Spiegel, M. R., and Spellman, D. (2009). *Vector analysis and an introduction to tensor analysis*. McGraw-Hill.
- Mandt, S., Hoffman, M. D., and Blei, D. M. (2017). Stochastic gradient descent as approximate bayesian inference. *The Journal of Machine Learning Research*, 18(1):4873–4907.
- Neyshabur, B., Bhojanapalli, S., McAllester, D., and Srebro, N. (2017). Exploring generalization in deep learning. In *Advances in Neural Information Processing Systems*, pages 5949–5958.
- Nguyen, T. H., Şimşekli, U., Gürbüzbalaban, M., and Richard, G. (2019). First exit time analysis of stochastic gradient descent under heavy-tailed gradient noise. *arXiv preprint arXiv:1906.09069*.
- Pawitan, Y. (2001). *In all likelihood: statistical modelling and inference using likelihood*. Oxford University Press.
- Raginsky, M., Rakhlin, A., and Telgarsky, M. (2017). Non-convex learning via stochastic gradient langevin dynamics: a nonasymptotic analysis. In *Conference on Learning Theory*, pages 1674–1703.
- Sagun, L., Evci, U., Guney, V. U., Dauphin, Y., and Bottou, L. (2017). Empirical analysis of the hessian of over-parametrized neural networks. *arXiv preprint arXiv:1706.04454*.
- Sato, I. and Nakagawa, H. (2014). Approximation analysis of stochastic gradient langevin dynamics by using fokker-planck equation and ito process. In *International Conference on Machine Learning*, pages 982–990.
- Simsekli, U., Sagun, L., and Gurbuzbalaban, M. (2019). A tail-index analysis of stochastic gradient noise in deep neural networks. In *International Conference on Machine Learning*, pages 5827–5837.
- Smith, S. L., Kindermans, P.-J., and Le, Q. V. (2018). Don’t decay the learning rate, increase the batch size. In *International Conference on Learning Representations*.
- Smith, S. L. and Le, Q. V. (2018). A bayesian perspective on generalization and stochastic gradient descent. In *International Conference on Learning Representations*.
- Tsuzuku, Y., Sato, I., and Sugiyama, M. (2019). Normalized flat minima: Exploring scale invariant definition of flat minima for neural networks using pac-bayesian analysis. *arXiv preprint arXiv:1901.04653*.
- Van Kampen, N. G. (1992). *Stochastic processes in physics and chemistry*, volume 1. Elsevier.
- Welling, M. and Teh, Y. W. (2011). Bayesian learning via stochastic gradient langevin dynamics. In *Proceedings of the 28th international conference on machine learning (ICML-11)*, pages 681–688.

- Wu, L., Ma, C., and Weinan, E. (2018). How sgd selects the global minima in over-parameterized learning: A dynamical stability perspective. In *Advances in Neural Information Processing Systems*, pages 8279–8288.
- Wu, L., Zhu, Z., et al. (2017). Towards understanding generalization of deep learning: Perspective of loss landscapes. *arXiv preprint arXiv:1706.10239*.
- Xu, P., Chen, J., Zou, D., and Gu, Q. (2018). Global convergence of langevin dynamics based algorithms for nonconvex optimization. In *Advances in Neural Information Processing Systems*, pages 3122–3133.
- Yao, Z., Gholami, A., Lei, Q., Keutzer, K., and Mahoney, M. W. (2018). Hessian-based analysis of large batch training and robustness to adversaries. In *Advances in Neural Information Processing Systems*, pages 4949–4959.
- Zhang, C., Bengio, S., Hardt, M., Recht, B., and Vinyals, O. (2017a). Understanding deep learning requires rethinking generalization. In *International Conference on Machine Learning*.
- Zhang, G., Li, L., Nado, Z., Martens, J., Sachdeva, S., Dahl, G., Shallue, C., and Grosse, R. B. (2019). Which algorithmic choices matter at which batch sizes? insights from a noisy quadratic model. In *Advances in Neural Information Processing Systems*, pages 8196–8207.
- Zhang, Y., Liang, P., and Charikar, M. (2017b). A hitting time analysis of stochastic gradient langevin dynamics. In *Conference on Learning Theory*, pages 1980–2022.
- Zhou, H.-X. (2010). Rate theories for biologists. *Quarterly reviews of biophysics*, 43(2):219–293.
- Zhu, Z., Wu, J., Yu, B., Wu, L., and Ma, J. (2019). The anisotropic noise in stochastic gradient descent: Its behavior of escaping from sharp minima and regularization effects.

A Proofs

A.1 Proof of Theorem 3.1

Proof. This proposition is a well known conclusion in statistical physics under Assumption 1, 2 and 3. We still provide an intuitional proof here, and the following proof of SGD Diffusion will closely relate to this proof. We decompose the proof into two steps: 1) compute the probability of locating in valley a , $P(\theta \in V_a)$, and 2) compute the probability flux $j = \int_{S_a} J \cdot dS$.

Without losing generality, we first prove the one-dimensional case.

Step 1: Under Assumption 1, the stationary distribution around minimum a is $P(\theta) = P(a) \exp[-\frac{L(\theta) - L(a)}{T}]$, where $T = D$. Under Assumption 3, we may only consider the second order Taylor approximation of the density function around critical points. We use the T notation as the temperature parameter in the stationary distribution, and use the D notation as the diffusion coefficient in the dynamics, for their different roles.

$$P(\theta \in V_a) \tag{10}$$

$$= \int_{\theta \in V_a} P(\theta) dV \tag{11}$$

$$= \int_{\theta \in V_a} P(a) \exp \left[-\frac{L(\theta) - L(a)}{T} \right] d\theta \tag{12}$$

$$= P(a) \int_{\theta \in V_a} \exp \left[-\frac{\frac{1}{2}(\theta - a)^\top H_a(\theta - a) + \mathcal{O}(\Delta\theta^3)}{T} \right] d\theta \tag{13}$$

$$= P(a) \frac{(2\pi T)^{\frac{1}{2}}}{H_a^{\frac{1}{2}}}. \tag{14}$$

Step 2:

$$J = P(\theta) \nabla L(\theta) + P(\theta) \nabla D + D \nabla P(\theta) \quad (15)$$

$$J = P(\theta) \left(\nabla L(\theta) + \nabla D - \frac{D}{T} \nabla L(\theta) \right) \quad (16)$$

$$\nabla D = \left(\frac{D}{T} - 1 \right) \nabla L \quad (17)$$

Apply this result to the Fokker-Planck Equation 4, we have

$$\nabla \cdot \nabla [D(\theta) P(\theta, t)] \quad (18)$$

$$= \nabla \cdot D \nabla P(\theta, t) + \nabla \cdot \left[\left(\frac{D}{T} - 1 \right) \nabla L(\theta) \right] P(\theta, t) \quad (19)$$

And thus we obtain the Smoluchowski equation and a new form of J

$$\frac{\partial P(\theta, t)}{\partial t} = \nabla \cdot \left[D \left(\frac{1}{T} \nabla L(\theta) + \nabla \right) P(\theta, t) \right] = -\nabla \cdot J(\theta, t), \quad (20)$$

$$J(\theta) = D \exp \left(\frac{-L(\theta)}{T} \right) \nabla \left[\exp \left(\frac{L(\theta)}{T} \right) P(\theta) \right]. \quad (21)$$

We note that the probability density outside Valley a must be zero, $P(c) = 0$. As we want to compute the probability flux escaping from Valley a in the proof, the probability flux escaping from other valleys into Valley a should be ignored. Under Assumption 2, we integrate the equation from Valley a to the outside of Valley a along the most possible escape path

$$\int_a^c \frac{\partial}{\partial \theta} \left[\exp \left(\frac{L(\theta)}{T} \right) P(\theta) \right] d\theta = \int_a^c -\frac{J}{D} \exp \left(\frac{L(\theta)}{T} \right) d\theta \quad (22)$$

$$\exp \left(\frac{L(\theta)}{T} \right) P(\theta) \Big|_a^c = -\frac{J}{D} \int_a^c \exp \left(\frac{L(\theta)}{T} \right) d\theta \quad (23)$$

$$0 - \exp \left(\frac{L(a)}{T} \right) P(a) = -\frac{J}{D} \int_a^c \exp \left(\frac{L(\theta)}{T} \right) d\theta \quad (24)$$

$$J = \frac{D \exp \left(\frac{L(a)}{T} \right) P(a)}{\int_a^c \exp \left(\frac{L(\theta)}{T} \right) d\theta}. \quad (25)$$

We move J to the outside of integral based on Gauss's Divergence Theorem, because J is fixed on the escape path from one minimum to another. As there is no field source on the escape path, $\int_V \nabla \cdot J(\theta) dV = 0$. Then $\nabla J(\theta) = 0$. Obviously, only minima are probability sources in deep learning. Under Assumption 3 and the second-order Taylor approximation, we have

$$\int_a^c \exp \left(\frac{L(\theta)}{T} \right) d\theta \quad (26)$$

$$= \int_a^c \exp \left[\frac{L(b) + \frac{1}{2}(\theta - b)^\top H_b(\theta - b) + \mathcal{O}(\Delta\theta^3)}{T} \right] d\theta \quad (27)$$

$$\approx \exp \left(\frac{L(b)}{T} \right) \int_{-\infty}^{+\infty} \exp \left[\frac{\frac{1}{2}(\theta - b)^\top H_b(\theta - b)}{T} \right] d\theta \quad (28)$$

$$= \exp \left(\frac{L(b)}{T} \right) \sqrt{\frac{2\pi T}{|H_b|}}. \quad (29)$$

Based on the results of Step 1 and Step 2, we obtain

$$\gamma = \frac{\int_{S_a} J \cdot dS}{P(\theta \in V_a)} = \frac{J}{P(\theta \in V_a)} \quad (30)$$

$$= \frac{DP(a) \exp\left(\frac{L(a)}{T}\right)}{\exp\left(\frac{L(b)}{T}\right) \sqrt{\frac{2\pi T}{|H_b|}}} \frac{1}{P(a) \sqrt{\frac{2\pi T}{H_a}}} \quad (31)$$

$$= \frac{D\sqrt{H_a|H_b|}}{2\pi T} \exp\left(-\frac{\Delta L_{ab}}{T}\right) \quad (32)$$

$$= \frac{\sqrt{H_a|H_b|}}{2\pi} \exp\left(-\frac{\Delta L_{ab}}{D}\right) \quad (33)$$

We generalize the proof of one-dimensional diffusion to high-dimensional diffusion

Step 1:

$$P(\theta \in V_a) \quad (34)$$

$$= \int_{\theta \in V_a} P(\theta) dV \quad (35)$$

$$= \int_{\theta \in V_a} P(a) \exp\left[-\frac{L(\theta) - L(a)}{T}\right] dV \quad (36)$$

$$= P(a) \int_{\theta \in V_a} \exp\left[-\frac{\frac{1}{2}(\theta - a)^\top H_a(\theta - a) + \mathcal{O}(\Delta\theta^3)}{T}\right] dV \quad (37)$$

$$= P(a) \frac{(2\pi T)^{\frac{n}{2}}}{\det(H_a)^{\frac{1}{2}}} \quad (38)$$

Step 2: Based on the formula of the one-dimensional probability current and flux, we obtain

$$\int_{S_b} J \cdot dS \quad (39)$$

$$= J_b \int_{S_b} \exp\left[-\frac{\frac{1}{2}(\theta - b)^\top H_b^+(\theta - b)}{T}\right] dS \quad (40)$$

$$= J_b \frac{(2\pi T)^{\frac{n-1}{2}}}{(\prod_{i=1}^{n-1} H_{bi})^{\frac{1}{2}}} \quad (41)$$

So we have

$$\tau = 2\pi \sqrt{\frac{\prod_{i=1}^{n-1} H_{bi}}{\det(H_a)|H_{be}|}} \exp\left(\frac{\Delta L}{T}\right) \quad (42)$$

$$= 2\pi \sqrt{\frac{-\det(H_b)}{\det(H_a)|H_{be}|}} \frac{1}{|H_{be}|} \exp\left(\frac{\Delta L}{D}\right). \quad (43)$$

□

A.2 Proof of Theorem 3.2

Proof. We decompose the proof into two steps and analyze the one-dimensional case like before. The following proof is similar to the proof of SGLD except that we make T_a the temperature near the minimum a and T_b the temperature near the saddle point b.

One-dimensional SGD Diffusion:

Step 1: Under Assumption 3, we may only consider the second order Taylor approximation of the density function around critical points.

$$P(\theta \in V_a) \quad (44)$$

$$= \int_{\theta \in V_a} P(\theta) dV \quad (45)$$

$$= \int_{\theta \in V_a} P(a) \exp \left[-\frac{L(\theta) - L(a)}{T_a} \right] dV \quad (46)$$

$$= P(a) \int_{\theta \in V_a} \exp \left[-\frac{\frac{1}{2}(\theta - a)^\top H_a(\theta - a) + \mathcal{O}(\Delta\theta^3)}{T_a} \right] d\theta \quad (47)$$

$$= P(a) \frac{(2\pi T_a)^{\frac{1}{2}}}{H_a^{\frac{1}{2}}} \quad (48)$$

Step 2:

$$J = P(\theta) \nabla L(\theta) + P(\theta) \nabla D + D \nabla P(\theta) \quad (49)$$

$$J = P(\theta) \left[\nabla L(\theta) + \nabla D - \frac{D}{T} \nabla L(\theta) - D L(\theta) \nabla \left(\frac{1}{T} \right) \right] \quad (50)$$

According to Equation 7, $\nabla \left(\frac{1}{T} \right)$ is ignorable near the minimum a and the col b, thus

$$\nabla D = \left(\frac{D}{T} - 1 \right) \nabla L. \quad (51)$$

Apply this result to the Fokker-Planck Equation 4, we have

$$\nabla \cdot \nabla [D(\theta) P(\theta, t)] \quad (52)$$

$$= \nabla \cdot D \nabla P(\theta, t) + \nabla \cdot \left[\left(\frac{D}{T} - 1 \right) \nabla L(\theta) \right] P(\theta, t) \quad (53)$$

And thus we obtain the Smoluchowski equation and a new form of J

$$\frac{\partial P(\theta, t)}{\partial t} = \nabla \cdot \left[D \left(\frac{1}{T} \nabla L(\theta) + \nabla \right) P(\theta, t) \right] = -\nabla \cdot J, \quad (54)$$

$$J = D \exp \left(\frac{-L(\theta)}{T} \right) \nabla \left[\exp \left(\frac{L(\theta)}{T} \right) P(\theta) \right]. \quad (55)$$

We note that the Smoluchowski equation is true only near critical points. We assume the point s is the midpoint on the most possible path between a and b, where $L(s) = (1-s)L(a) + sL(b)$. The temperature T_a dominates the path $a \rightarrow s$, while temperature T_b dominates the path $s \rightarrow b$. So we have

$$\nabla \left[\exp \left(\frac{L(\theta) - L(s)}{T} \right) P(\theta) \right] = J D^{-1} \exp \left(\frac{L(\theta) - L(s)}{T} \right). \quad (56)$$

Under Assumption 2, we integrate the equation from Valley a to the outside of Valley a along the most possible escape path

$$Left = \int_a^c \frac{\partial}{\partial \theta} \left[\exp \left(\frac{L(\theta) - L(s)}{T} \right) P(\theta) \right] d\theta \quad (57)$$

$$= \int_a^s \frac{\partial}{\partial \theta} \left[\exp \left(\frac{L(\theta) - L(s)}{T_a} \right) P(\theta) \right] d\theta \quad (58)$$

$$+ \int_s^c \frac{\partial}{\partial \theta} \left[\exp \left(\frac{L(\theta) - L(s)}{T_b} \right) P(\theta) \right] d\theta \quad (59)$$

$$= [P(s) - \exp \left(\frac{L(a) - L(s)}{T_a} \right) P(a)] + [0 - P(s)] \quad (60)$$

$$= -\exp \left(\frac{L(a) - L(s)}{T_a} \right) P(a) \quad (61)$$

$$Right = -J \int_a^c D^{-1} \exp\left(\frac{L(\theta) - L(s)}{T}\right) d\theta \quad (62)$$

We move J to the outside of integral based on Gauss's Divergence Theorem, because J is fixed on the escape path from one minimum to another. As there is no field source on the escape path, $\int_V \nabla \cdot J(\theta) dV = 0$ and $\nabla J(\theta) = 0$. Obviously, only minima are probability sources in deep learning. So we obtain

$$J = \frac{\exp\left(\frac{L(a) - L(s)}{T_a}\right) P(a)}{\int_a^c D^{-1} \exp\left(\frac{L(\theta) - L(s)}{T}\right) d\theta}. \quad (63)$$

Under Assumption 3, we have

$$\int_a^c D^{-1} \exp\left(\frac{L(\theta) - L(s)}{T}\right) d\theta \quad (64)$$

$$\approx \int_a^c D^{-1} \exp\left[\frac{L(b) - L(s) + \frac{1}{2}(\theta - b)^\top H_b(\theta - b)}{T_b}\right] d\theta \quad (65)$$

$$\approx D_b^{-1} \int_{-\infty}^{+\infty} \exp\left[\frac{L(b) - L(s) + \frac{1}{2}(\theta - b)^\top H_b(\theta - b)}{T_b}\right] d\theta \quad (66)$$

$$= D_b^{-1} \exp\left(\frac{L(b) - L(s)}{T_b}\right) \sqrt{\frac{2\pi T_b}{|H_b|}}. \quad (67)$$

Based on the results of Step 1 and Step 2, we have

$$\gamma = \frac{\int_{S_a} J \cdot dS}{P(\theta \in V_a)} = \frac{J}{P(\theta \in V_a)} \quad (68)$$

$$= \frac{P(a) \exp\left(\frac{L(a) - L(s)}{T_a}\right)}{D_b^{-1} \exp\left(\frac{L(b) - L(s)}{T_b}\right) \sqrt{\frac{2\pi T_b}{|H_b|}}} \frac{1}{P(a) \sqrt{\frac{2\pi T_a}{|H_a|}}} \quad (69)$$

$$= \frac{\sqrt{T_b |H_a| |H_b|}}{2\pi \sqrt{T_a}} \exp\left(-\frac{L(s) - L(a)}{T_a} - \frac{L(b) - L(s)}{T_b}\right) \quad (70)$$

$$= \frac{\sqrt{T_b |H_a| |H_b|}}{2\pi \sqrt{T_a}} \exp\left(-\frac{s\Delta L}{T_a} - \frac{(1-s)\Delta L}{T_b}\right) \quad (71)$$

So we have

$$\tau = \frac{1}{\gamma} = 2\pi \sqrt{\frac{T_a}{T_b |H_a| |H_b|}} \exp\left(\frac{s\Delta L}{T_a} + \frac{(1-s)\Delta L}{T_b}\right). \quad (72)$$

In the case of pure SGN, $T_a = \frac{\eta}{2B} H_a$ and $T_b = -\frac{\eta}{2B} H_b$ gives

$$\tau = \frac{1}{\gamma} = 2\pi \frac{1}{|H_b|} \exp\left[\frac{2B\Delta L}{\eta} \left(\frac{s}{H_a} + \frac{(1-s)}{|H_b|}\right)\right]. \quad (73)$$

We generalize the proof above into the high-dimensional SGD diffusion.

Step 1:

$$P(\theta \in V_a) \quad (74)$$

$$= \int_{\theta \in V_a} P(\theta) dV \quad (75)$$

$$= P(a) \int_{\theta \in V_a} \exp\left[-\frac{1}{2}(\theta - a)^\top (D_a^{-\frac{1}{2}} H_a D_a^{-\frac{1}{2}})(\theta - a)\right] dV \quad (76)$$

$$= P(a) \frac{(2\pi)^{\frac{n}{2}}}{\det(D_a^{-1} H_a)^{\frac{1}{2}}} \quad (77)$$

Step 2: Based on the formula of the one-dimensional probability current and flux, we obtain the high-dimensional flux escaping through Col b:

$$\int_{S_b} J \cdot dS \quad (78)$$

$$= J_{1d} \int_{S_b} \exp \left[-\frac{1}{2} (\theta - b)^\top [D_b^{-\frac{1}{2}} H_b D_b^{-\frac{1}{2}}]^\perp (\theta - b) \right] dS \quad (79)$$

$$= J_{1d} \frac{(2\pi)^{\frac{n-1}{2}}}{(\prod_{i \neq e} (D_{bi}^{-1} H_{bi}))^{\frac{1}{2}}}, \quad (80)$$

where $[\cdot]^\perp$ indicates the directions perpendicular to the escape direction e . So we have

$$\gamma = \frac{1}{2\pi} \sqrt{\frac{\det(H_a D_a^{-1})}{-\det(H_b D_b^{-1})}} |H_{be}| \exp \left(-\frac{s\Delta L}{T_a} - \frac{(1-s)\Delta L}{T_b} \right) \quad (81)$$

T_a and T_b are the eigenvalues of $H_a^{-1} D_a$ and $H_b^{-1} D_b$ corresponding to the escape direction. We know $D_a = \frac{\eta}{2B} H_a$ and $D_b = \frac{\eta}{2B} [H_b]^\perp$. As D must be positive semidefinite, we replace $H_b = U_b^\top \text{diag}(H_{b1}, \dots, H_{b(n-1)}, H_{be}) U_b$ by its positive semidefinite analog $[H_b]^\perp = U_b^\top \text{diag}(H_{b1}, \dots, H_{b(n-1)}, |H_{be}|) U_b$. Thus we have

$$\tau = \frac{1}{\gamma} = 2\pi \frac{1}{|H_{be}|} \exp \left[\frac{2B\Delta L}{\eta} \left(\frac{s}{H_{ae}} + \frac{(1-s)}{|H_{be}|} \right) \right]. \quad (82)$$

□

A.3 Proof of Proposition 1

Proof. A stationary distribution must have a balanced probability flux between valleys. So the probability flux of each valley must be equivalent,

$$P(\theta \in V_1) \gamma_{12} = P(\theta \in V_2) \gamma_{21} \quad (83)$$

As $\tau = \gamma^{-1}$, it leads to $P(\theta \in V_v) \propto \tau_v$. We normalize the total probability to 1, we obtain the result. □

B The Stochastic Gradient Noise Analysis

Figure 7 demonstrates that the stochastic gradient noise is also approximately Gaussian for training ResNet on CIFAR-10.

By Figure 8, we validate $C = \frac{H}{B}$ in the original coordinates on MNIST. By Figure 9, we also validate $C = \frac{H}{B}$ on another dataset, Avila, in the space spanned by the eigenvectors of Hessian. The relation $C = \frac{H}{B}$ can still be observed in these two cases.

Data Preprocessing: We perform the usual per-pixel zero-mean and unit-variance normalization on MNIST. We leave the preprocessing of Avila in C. **Model:** Fully-connected networks.


C Main Experiments

Figure 10, 11, and 12 respectively validate that the exponential relation of the escape rate with the Hessian, the batch size and the learning rate.


C.1 Experimental Settings

Datasets: a) Avila, b) Banknote Authentication, c) Cardiotocography, d) Dataset for Sensorless Drive Diagnosis.


Data Preprocessing: We perform per-pixel zero-mean and unit-variance normalization on input data. For simplicity, we also transform multi-class problems into binary-class problems by grouping labels, although this is unnecessary.

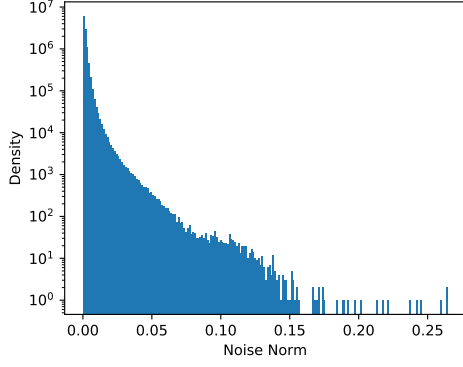


(a) Gradient Noise of one minibatch across parameters

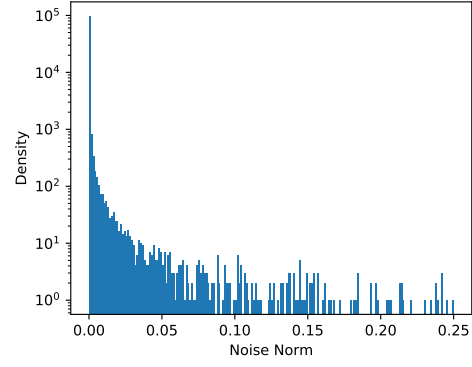

(b) Lévy noise

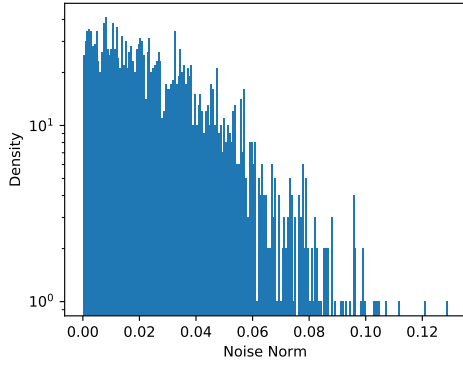

(c) Gradient Noise of one parameter across minibatches

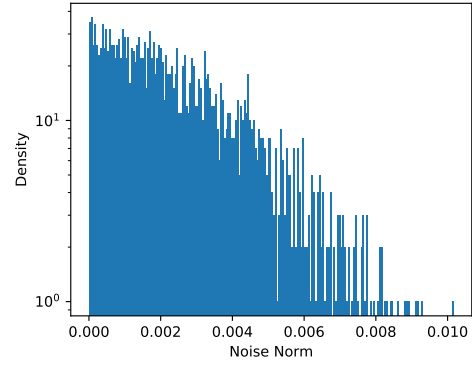

(d) Gaussian noise

Figure 7: The Gradient Noise Analysis. The histogram of the norm of the gradient noises computed with ResNet18 (He et al., 2016) on CIFAR-10 (Krizhevsky et al., 2009).

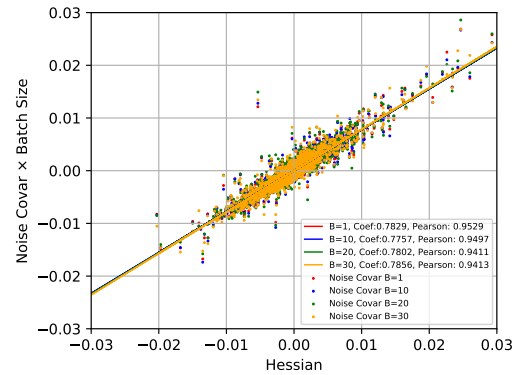
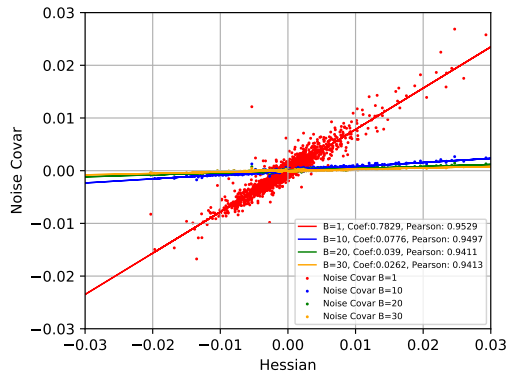


Figure 8: The plot of the SGN covariance and the Hessian by training fully-connected network on MNIST. We display all elements $H_{(i,j)} \in [-0.03, 0.03]$ of the Hessian matrix and the corresponding elements in gradient noise covariance matrix in the original coordinates.



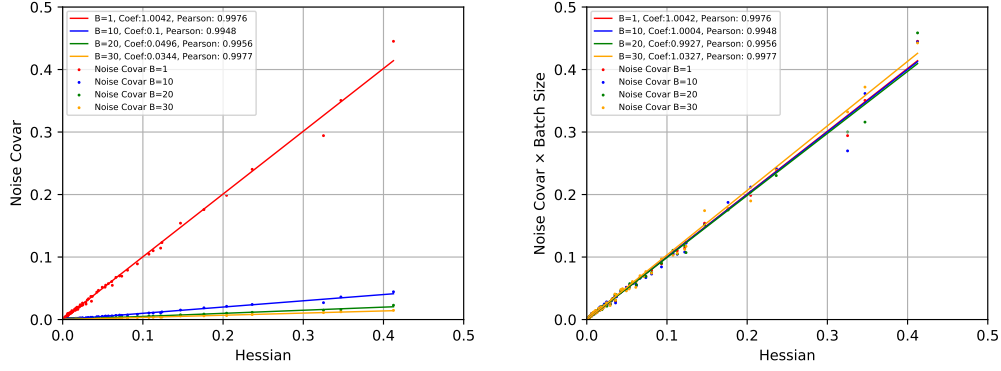



Figure 9: The plot of the SGN covariance and the Hessian by training fully-connected network on Avila. We display all elements $H_{(i,j)} \in [1e - 4, 0.5]$ of the Hessian matrix and the corresponding elements in gradient noise covariance matrix in the space spanned by the eigenvectors of Hessians.

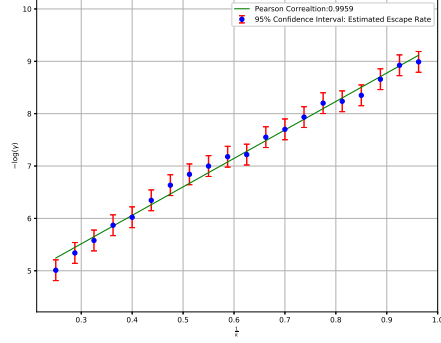


(a) Avila

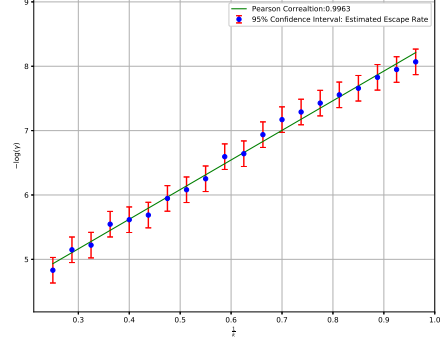

(b) Banknote

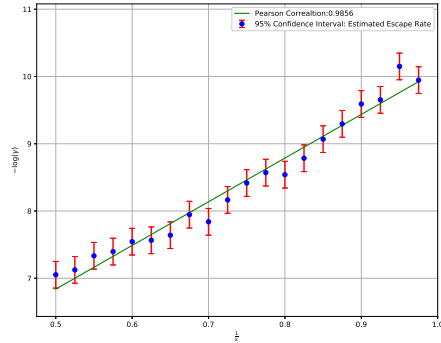


(c) Cardiotocography

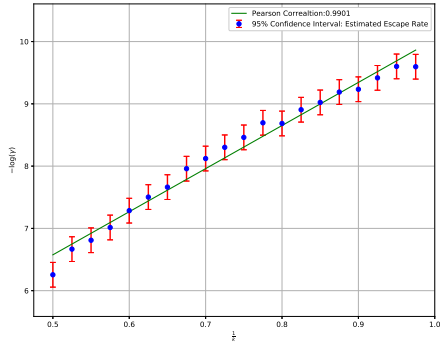


(d) Diagnosis


Figure 10: The escape rate exponentially depends on the “path Hessians” in the dynamics of SGD. $-\log(\gamma)$ is linear with $\frac{1}{k}$. The “path Hessians” indicates the eigenvalues of Hessians corresponding to the escape directions.

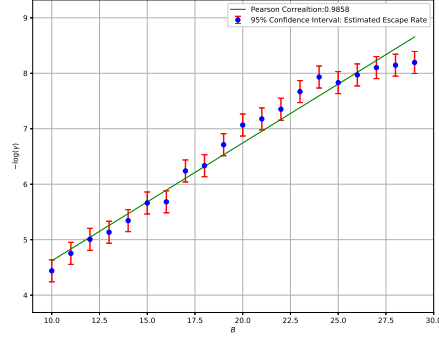


(a) Avila

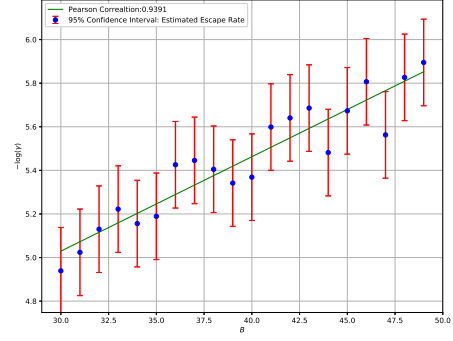

(b) Banknote

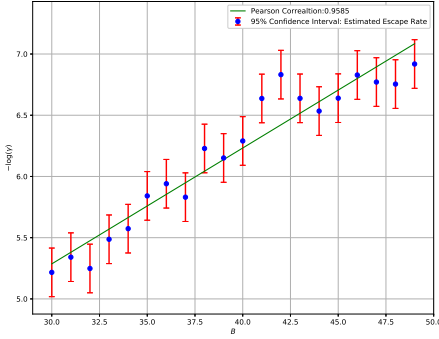

(c) Cardiotocography

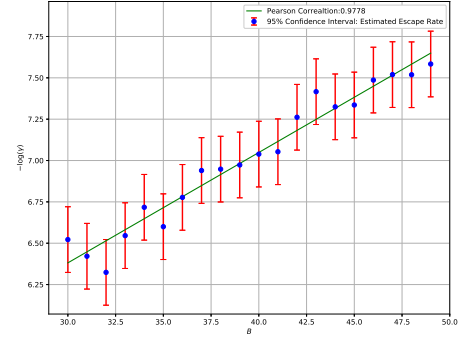

(d) Diagnosis


Figure 11: The escape rate exponentially depends on the batch size in the dynamics of SGD. $-\log(\gamma)$ is linear with B .

Model: Two-layer fully-connected networks with one hidden layer and 10 neurons per hidden layer.


Initializations: To ensure the initialized models are near minima, we first pretrain models with 200-1000 epochs to fit each data set as well as possible. We set the pretrained models' parameters as the initialized $\theta_{t=0}$.

Valleys' Boundary: In principle, any small neighborhood around $\theta_{t=0}$ can be regarded as the inside of the start valleys. In our experiments, we set each dimension's distance from $\theta_{t=0}$ should be less than 0.05, namely $|\Delta\theta_i| \leq 0.05$ for each dimension i . If we rescale the landscape by a factor k , the neighborhood will also be rescaled by k . Although we don't know which loss valleys exist inside the neighborhood, we know the landscape of the neighborhood is invariant in each simulation.


Hyperparameters: In Figure 10: (a) $\eta = 0.001, B = 1$, (b) $\eta = 0.015, B = 1$, (c) $\eta = 0.005, B = 1$, (d) $\eta = 0.0005, B = 1$. In Figure 11: (a) $\eta = 0.02$, (b) $\eta = 0.6$, (c) $\eta = 0.18$, (d) $\eta = 0.01$. In Figure 12: (a) $B = 1$, (b) $B = 1$, (c) $B = 1$, (d) $B = 1$. In Figure 13: (a) $\eta = 0.0002, B = 100$, (b) $\eta = 0.001, B = 100$, (c) $\eta = 0.0002, B = 100$, (d) $\eta = 0.0001, B = 100$. In Figure 14: (a) $\eta = 0.0002, B = 100, D = 0.0002$, (b) $\eta = 0.001, B = 100, D = 0.0001$, (c) $\eta = 0.0002, B = 100, D = 0.0005$, (d) $\eta = 0.0001, B = 100, D = 0.0003$. We note that the hyperparameters need be tuned for each initialized pretrained models, due to the stochastic property of deep learning. According to our experience, we can always find the hyperparameters to discover the quantitative relations as long as the pretrained model fits the data set well enough. The fined-tuned requirement can be avoided in Section , because the models in Section are artificially initialized.

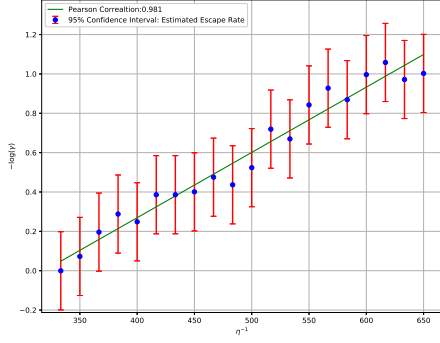


(a) Avila

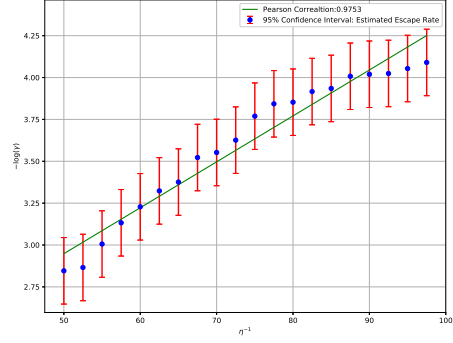

(b) Banknote

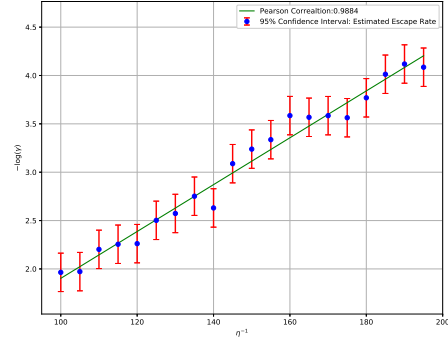

(c) Cardiotocography

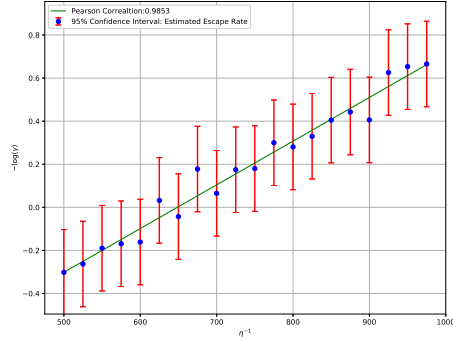

(d) Diagnosis

Figure 12: The escape rate exponentially depends on the learning rate in the dynamics of SGD. $-\log(\gamma)$ is linear with $\frac{1}{\eta}$. The estimated escape rate has incorporated η as the time unit.

Observation: we observe the number of iterations from the initialized position to the terminated position. We repeat experiments 100 times to estimate the escape rate γ and the mean escape time τ . As the escape time is a random variable obeying an exponential distribution, $t \sim \text{Exponential}(\gamma)$, the estimated escape rate can be written as


$$\hat{\gamma} = \frac{100 - 2}{\sum_{i=1}^{100} t_i}. \quad (84)$$

The 95% confidence interval of this estimator is


$$\hat{\gamma}(1 - \frac{1.96}{\sqrt{100}}) \leq \hat{\gamma} \leq \hat{\gamma}(1 + \frac{1.96}{\sqrt{100}}). \quad (85)$$

C.2 Experiments on SGLD


Experimental Results: Figure 13 shows a highly precise exponential relation of the escape rate and the diffusion coefficient in the figure. Figure 14 shows a proportional relation of the escape rate and the Hessian determinant in the figure. Overall, the empirical results support the density diffusion theory in the dynamics of white noise. In experiments on SGLD, we carefully adjust the injected gradient noise scale to ensure that D is significantly smaller than the loss barrier' height and large enough to dominate SGN scale. If D is too large, learning dynamics will be reduced to Free Brownian Motion.

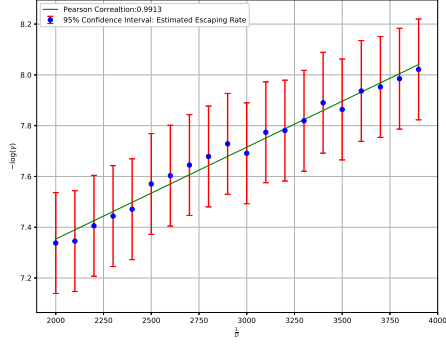


(a) Avila

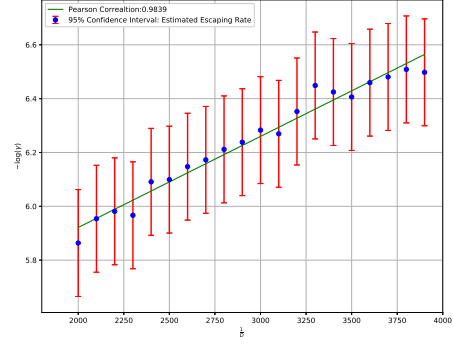

(b) Banknote

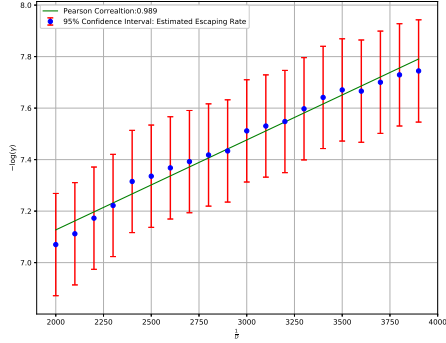

(c) Cardiotocography

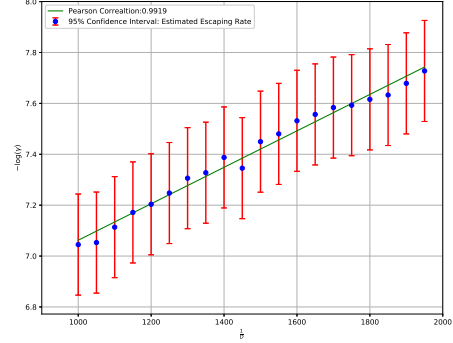

(d) Diagnosis

Figure 13: The relation of the escape rate and the isotropic diffusion coefficient D . The escape formula that $-\log(\gamma)$ is linear with $\frac{1}{D}$ is validated.


D Experiments on More Models

We supply experiments of training three models on artificial Gaussian datasets. In these experiments, we can analytically know the locations of the minima, Hessians and loss barriers, as each input feature is Gaussian noise.


D.1 Experiments Settings

Data Set: We generate 50000 Gaussian samples and random two-class labels as the training data set, $\{(x^{(i)}, y^{(i)}) | x^{(i)} \sim \mathcal{N}(0, I), y^{(i)} \in \{0, 1\}, i \in \{1, 2, \dots, 50000\}\}$.


Hyperparameters: In Figure 15: (a) $\eta = 0.0001, B = 100$, (b) $\eta = 0.001, B = 100$, (c) $\eta = 0.0003, B = 100$. In Figure 16: (a) $\eta = 0.0001, B = 50, D = 0.2$, (b) $\eta = 0.001, B = 50, D = 0.0005$, (c) $\eta = 0.0003, B = 1, D = 0.0003$. In Figure 17: (a) $\eta = 0.006, B = 50$, (b) $\eta = 0.05, B = 50$, (c) $\eta = 0.005, B = 1$. In Figure 18: (a) $\eta = 0.006$, (b) $\eta = 0.06$, (c) $\eta = 0.1$. In Figure 19: (a) $B = 1$, (b) $B = 1$, (c) $B = 1$. We note that the hyperparameters are recommended and needn't be fine tuned again. The artificially initialized parameters avoids the stochastic property of the initial states.

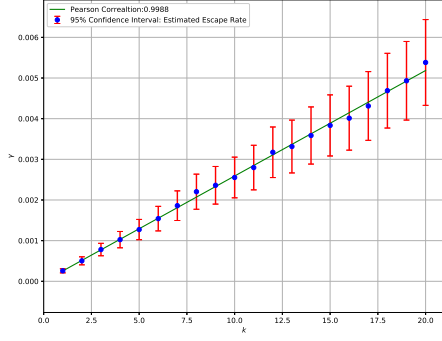


(a) Avila

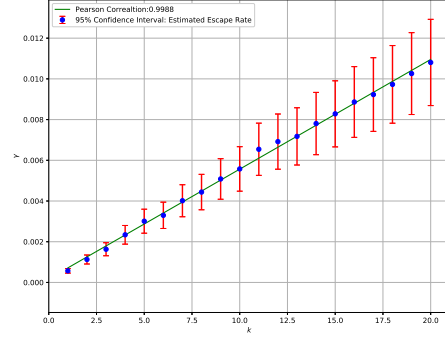

(b) Banknote

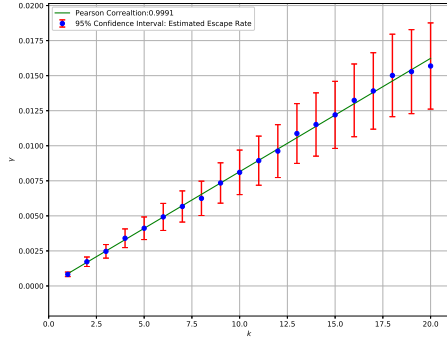

(c) Cardiotocography

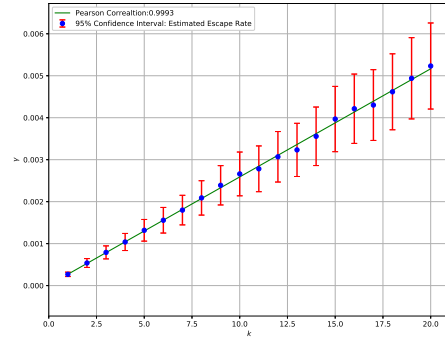

(d) Diagnosis

Figure 14: The relation of the escape rate and the Hessian determinant in the dynamics of white noise. The escape formula that γ is linear with k is validated.

Experiment Setting 1: Styblinski-Tang Function is a commonly used function in nonconvex optimization, written as

$$f(\theta) = \frac{1}{2} \sum_{i=1}^n (\theta_i^4 - 16\theta_i^2 + 5\theta_i).$$

We use high-dimensional Styblinski-Tang Function as the test function, and Gaussian samples as training data.

$$L(\theta) = f(\theta - x),$$

where data samples $x \sim \mathcal{N}(0, I)$. The one-dimensional Styblinski-Tang Function has one global minimum located at $a = -2.903534$, one local minimum located at d , and one saddle point $b = 0.156731$ as the boundary separating Valley a_1 and Valley a_2 . For a n -dimensional Styblinski-Tang Function, we initialize parameters $\theta_{t=0} = \frac{1}{\sqrt{k}}(-2.903534, \dots, -2.903534)$, and set the valley's boundary as $\theta_i < \frac{1}{\sqrt{k}}0.156731$, where i is the dimension index. We record the number of iterations required to escape from the valley to the outside of valley. The setting 1 does not need labels.

Experiment Setting 2: We study the learning dynamics of Logistic Regression. Parameters Initialization: $\theta_{t=0} = (0, \dots, 0)$. Valley Boundary: $-0.1 < \theta_i < 0.1$. Due to the randomness of training data and the symmetry of dimension, the origin must be a minimum and there are a lot unknown valleys neighboring the origin valley. And we can set an arbitrary boundary surrounding the origin valley group, and study the mean escape time from the group of valleys.

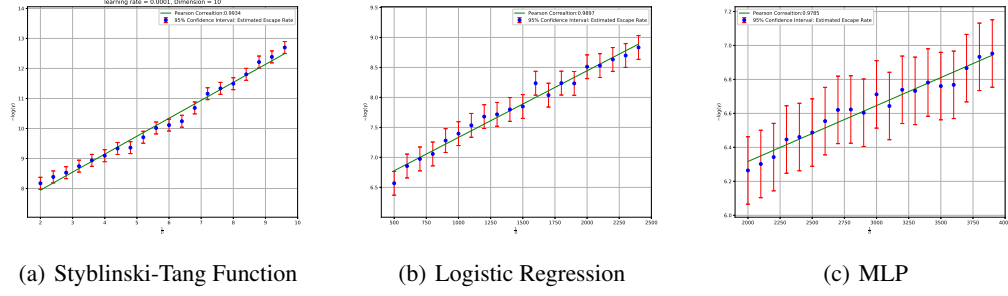


Figure 15: The relation of the escape rate and the diffusion coefficient D in the dynamics of SGLD. The escape formula that $-\log(\gamma)$ is linear with $\frac{1}{D}$ is validated in the setting of Styblinski-Tang Function, Logistic Regression and MLP.


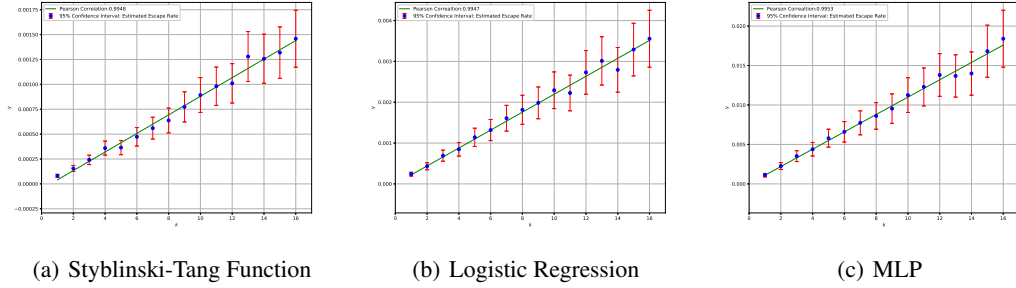


Figure 16: The relation of the escape rate and the Hessian determinants in the dynamics of SGLD. The escape formula that γ is linear with k is validated in the setting of Styblinski-Tang Function, Logistic Regression and MLP.


Experiment Setting 3: We study the learning dynamics of MLP with ReLu activations, cross entropy losses, depth as 3, and hidden layers' width as 10. Parameters Initialization: $\theta_{t=0} = (0.1, \dots, 0.1)$ with a small Gaussian noise $\epsilon = (0, 0.01I)$. Valley Boundary: $0.05 < \theta_i < 0.15$. To prevent the gradient disappearance problem of deep learning, we move the starting point from the origin. For symmetry breaking of deep learning, we add a small Gaussian noise to each parameter's initial value. Due to the complex loss landscape of deep networks, we can hardly know the exact information about valleys and cols. However, the escape formula can still approximately hold even if an arbitrary boundary surrounding an arbitrary group of valleys. We set the batch size as 1 in this setting. When the batch size is small, the gradient noise is more like a heavy-tailed noise. We can validate whether or not the propositions can hold with very-small-batch gradient noise in practice.

D.2 Experiments Results


Figure 15 shows the relation of the escape rate and the isotropic diffusion coefficient D . Figure 16 shows the relation of the escape rate and the Hessian determinant in the dynamics of white noise. Figure 17 shows the relation of the escape rate and the second order directional derivative in the dynamics of SGD. Figure 18 shows the relation of the escape rate and the batch size in the dynamics of SGD. Figure 19 shows the relation of the escape rate and the learning rate in the dynamics of SGD.



(a) Styblinski-Tang Function




(b) Logistic Regression




(c) MLP


Figure 17: The escape rate exponentially depends on the sharpness in the dynamics of SGD. The escape formula that $-\log(\gamma)$ is linear with $\frac{1}{k}$ is validated in the setting of Styblinski-Tang Function, Logistic Regression and MLP.



(a) Styblinski-Tang Function




(b) Logistic Regression




(c) MLP


Figure 18: The escape rate exponentially depends on the batch size in the dynamics of SGD. The escape formula that $-\log(\gamma)$ is linear with B is validated in the setting of Styblinski-Tang Function, Logistic Regression and MLP.



(a) Styblinski-Tang Function



(b) Logistic Regression



(c) MLP

Figure 19: The escape rate exponentially depends on the learning rate in the dynamics of SGD. The escape formula that $-\log(\gamma)$ is linear with $\frac{1}{\eta}$ is validated in the setting of Styblinski-Tang Function, Logistic Regression and MLP.